


Santuro 3-way concealed shower valve - Rectangular handle

Your bathroom, made **beautiful.**



TECHNICAL DRAWING

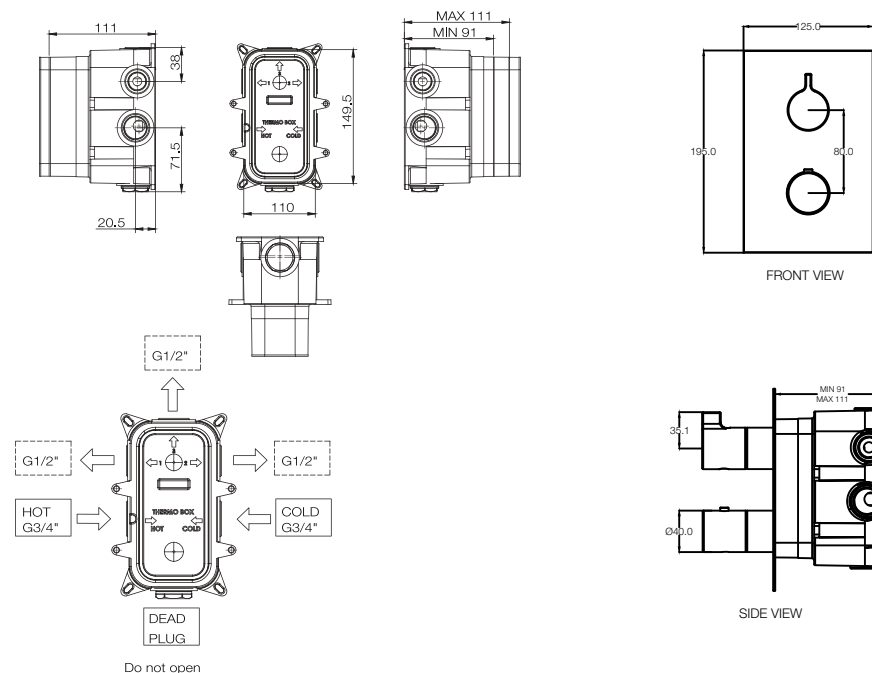

Finishes Chrome, Matt Black PVD, Brushed Brass PVD, Brushed Nickel PVD

Dimensions (Cover plate)	Height	195 mm
	Width	125 mm
Dimensions (Valve body)	Height	150 mm
	Width	110 mm
	Depth	117 mm
Wall void depth (from finished wall)	Min	91 mm
	Max	111 mm
Water connections	Supply	G 3/4
	Outlet	G 1/2
Operating pressures	Range	1 – 4 bar
	Recommended	3 bar
Max temperature	70° C	
Outlet ports	3	
Weight	2 kg	
Warranty	10 years	
Accreditations	WRAS	241002071
	NSF Reg 4	241077
Codes	Chrome	TSN-305-CP
	Matt Black	TSN-305-MN
	Brushed Brass	TSN-305-BB
	Brushed Nickel	TSN-305-BN
Plugs included to blank off unused outlet ports		
See separate datasheets for information on handsets and shower heads		

Water Pressure (Bar)	Flow rate (l/min)
0	0
0.5	14.1
1.0	18.0
2.0	22.0
3.0	27.5
4.0	31.0
5.0	33.5

Flow rate graph

