


Built-in Parts

THERMOSTATIC BOX

THERMOSTATIC DIVERTER


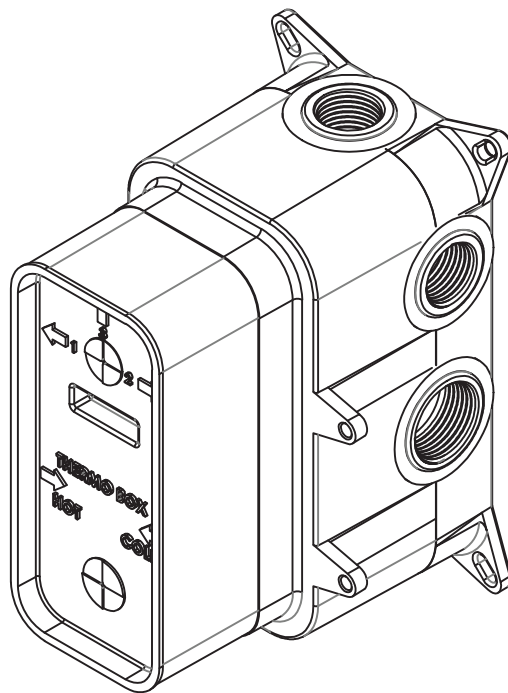


ASSEMBLY, USE AND
MAINTENANCE INSTRUCTIONS

**READ CAREFULLY BEFORE
INSTALLING.**



TECHNICAL DRAWING

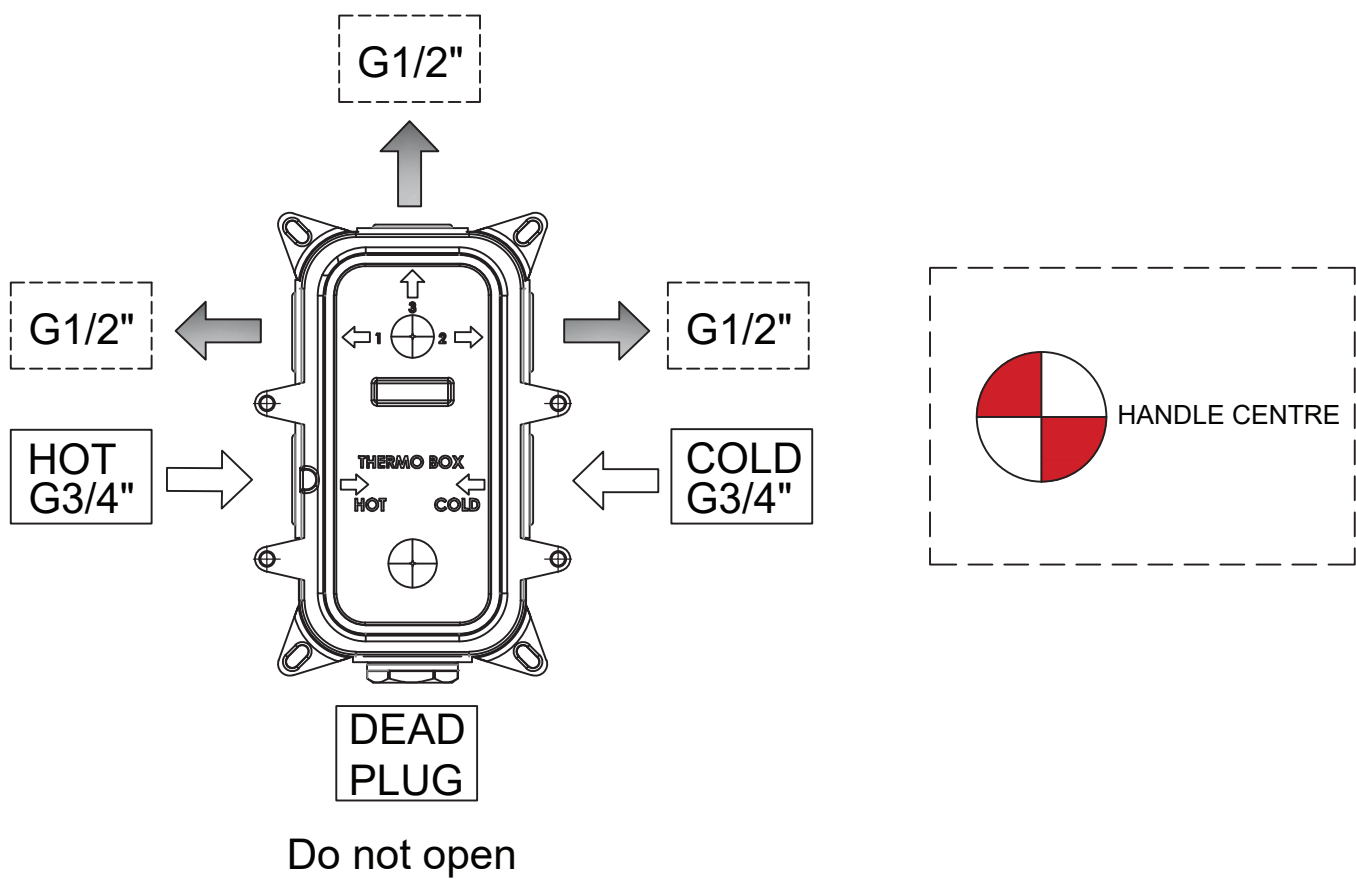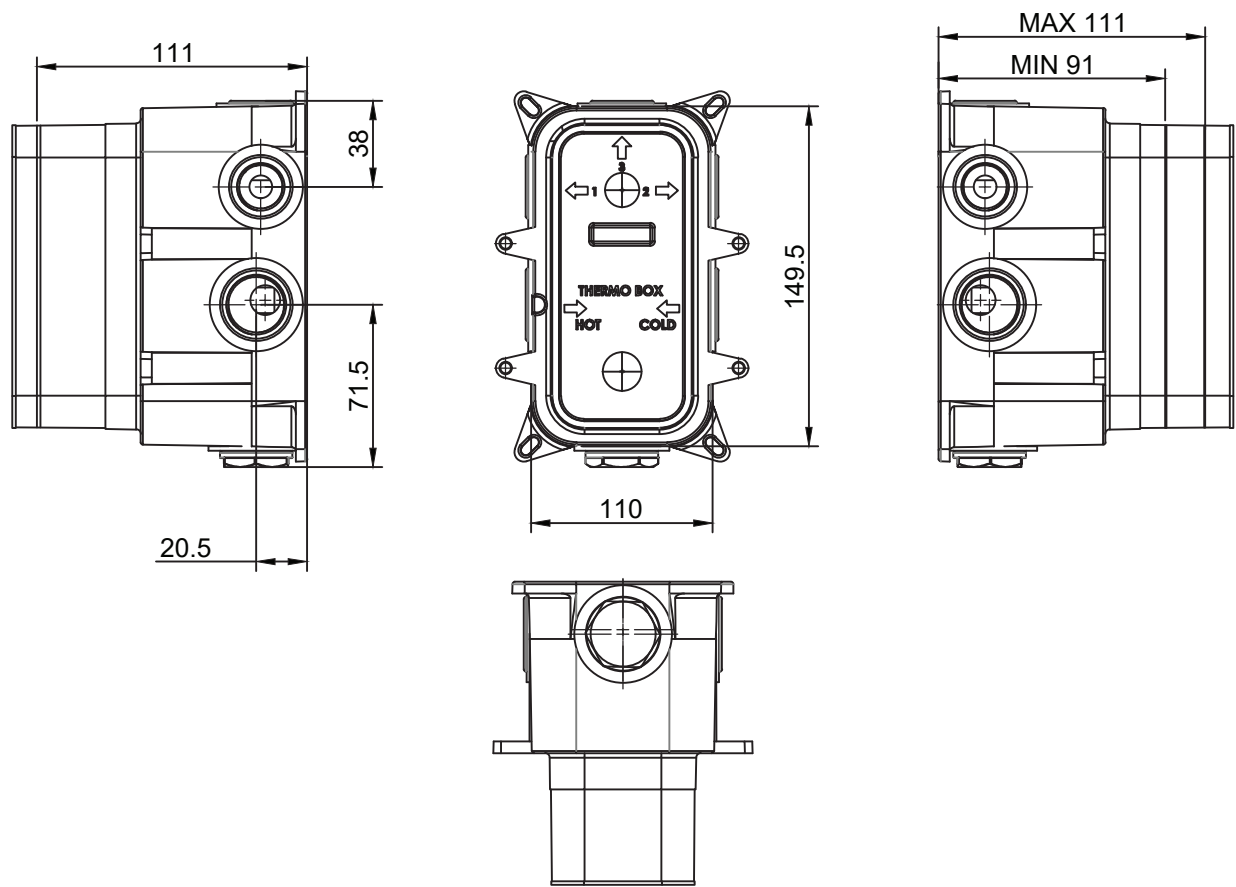

TECHNICAL DATA

Working Pressure= 1-4bar*

Recommended Pressure = 3bar

Temperature =MAX 70°C

*Product standard characteristics cannot be guaranteed if pressure is inferior to 1 bar. Above 4 bar a pressure regulator must be installed. Failure to follow the indications below releases Tissino Ltd from any responsibility regarding product malfunctioning and resulting damages.

Caution! The water supply pipes must be washed/ drained with care before the device installation, so that no impurities and air remain inside. Foreign objects, that could prevent the product from operating properly, may enter in the device through not carefully washed pipes or through the general water network. It is therefore recommended the use of filters also in the general system. Ensure that the system is protecting against sudden changes in pressure, even occasional, commonly called water hammer. If it is not, set up appropriate arrangements to prevent this phenomenon. The water hammer can cause damage or breakage.

Warning - It is suggested to assemble a pressure regulator before the inlet piping line to ensure a 3-bar constant pressure. Before assembling, verify that the inlet piping lines are free of any waste, then close the installation.


In order to avoid the risk of damage to property and people need to be monitored carefully to the instructions of the installation, use and maintenance. Keep away from the reach of children.



OUTLETS			
Flow rate in open outlet			
[Bar]	[outlet 1]	[outlet 2]	[outlet 3]
.5	14.1	14.1	14.1
1	18	18	18
2	22	22	22
3	27.5	27.5	27.5
4	31	31	31
5	33.5	33.5	33.5

PACKAGE CONTENT

1

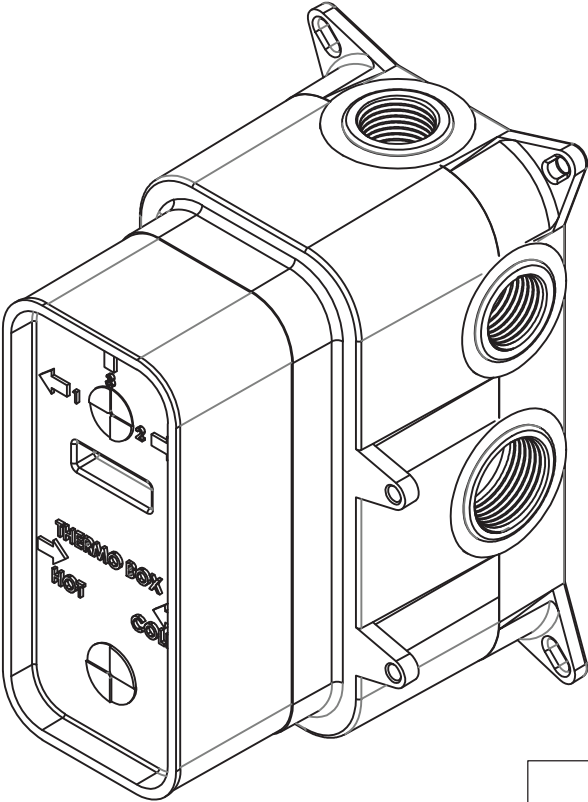

3




2

tiissino

Designed to Inspire
Made to Experience

Built-in Parts

THERMOSTATIC BOX
THERMOSTATIC DIVERTER



ASSEMBLY, USE AND
MAINTENANCE INSTRUCTIONS

READ CAREFULLY BEFORE
INSTALLING.

tiissino

Lyncastle Road, Appleton Thorn, Warrington WA4 4SN
info@tiissino.co.uk
+44 (0) 345 582 8000


tiissino.co.uk



YOUR BATHROOM
MADE BEAUTIFUL









Important Information- Complying thoroughly with the following installation, use and maintenance instructions allows the best product working and maintenance. Tissino Ltd does not warrant their product in case of damages caused by the non-compliance of these instructions.

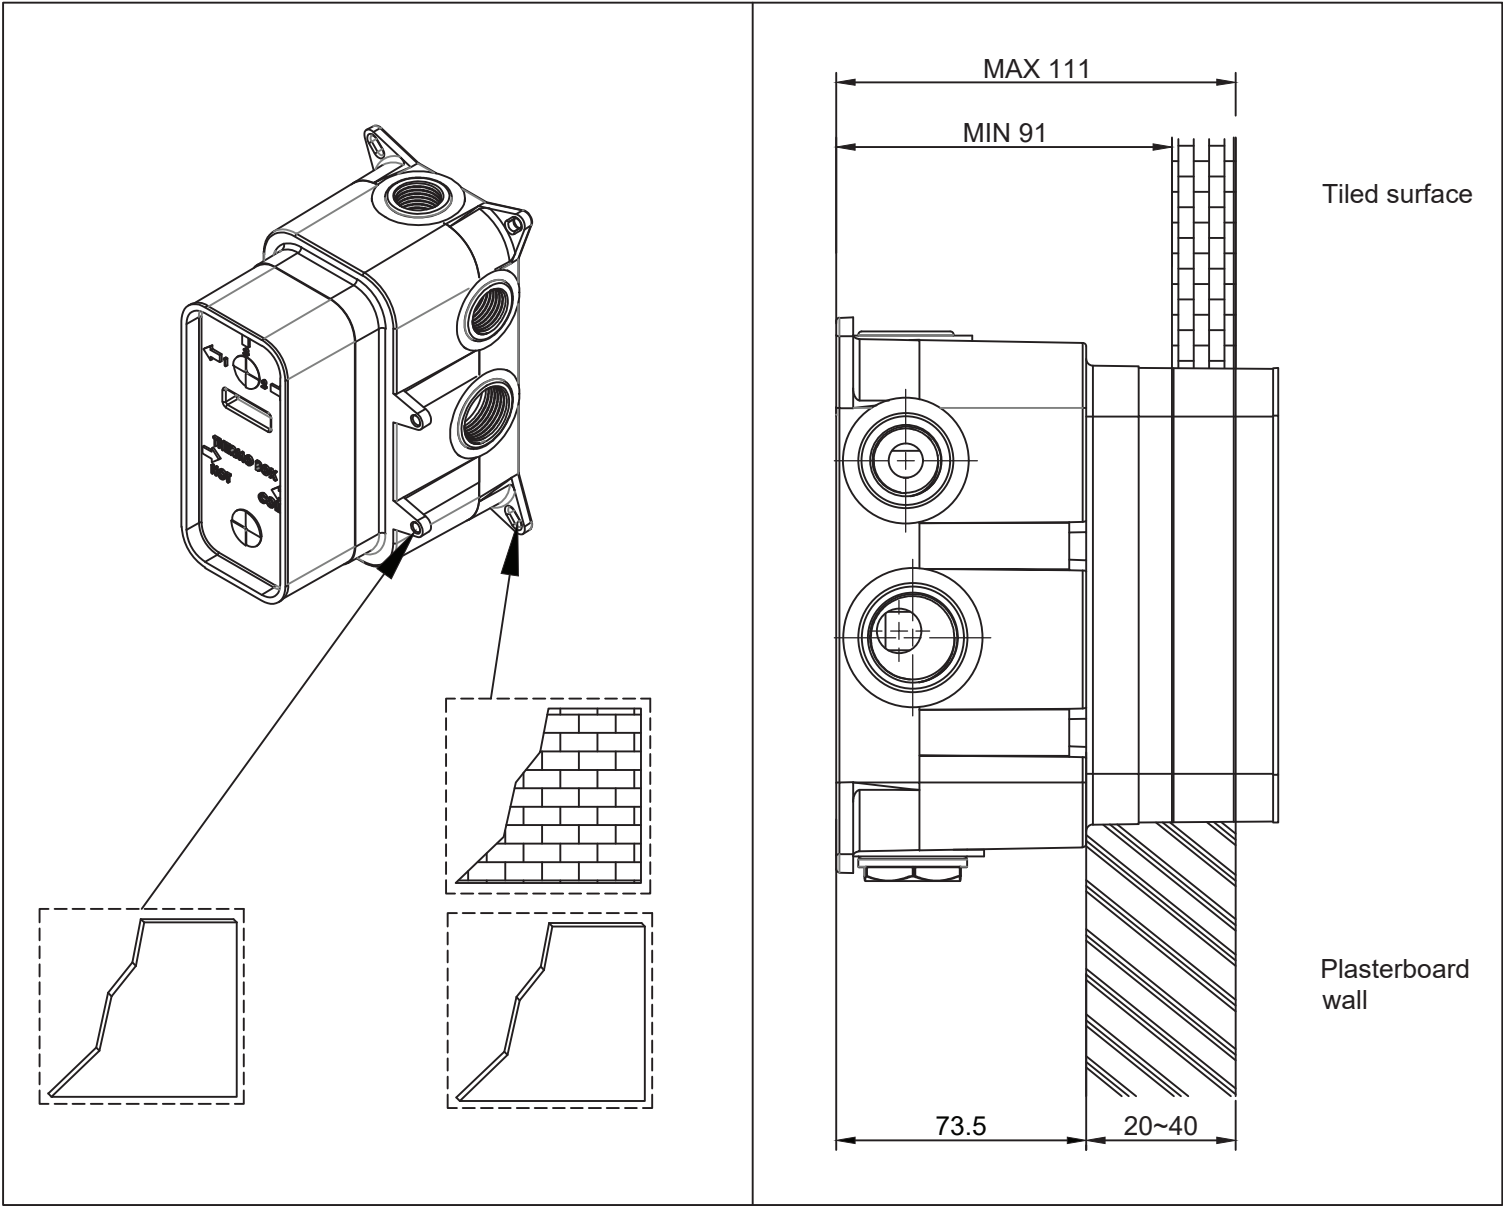

Possible installations


To create the proper seat for the built-in body check the actual overall sizes and consider the minimum and maximum built-in depths shown on the plastic protection pre-installed on the body.

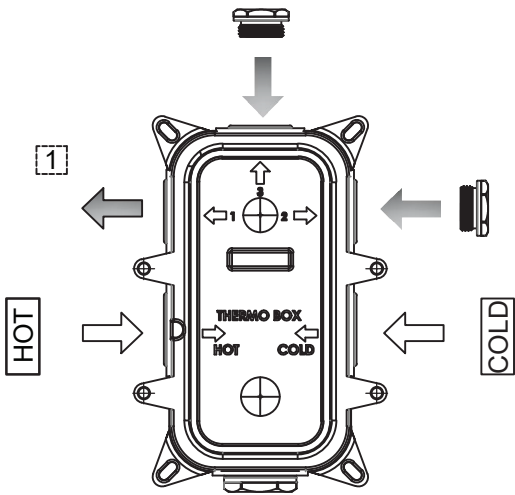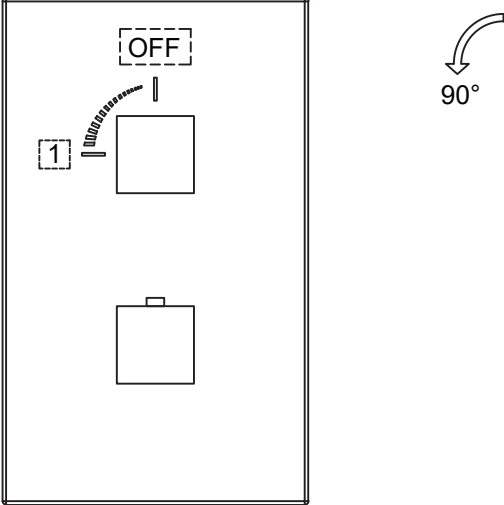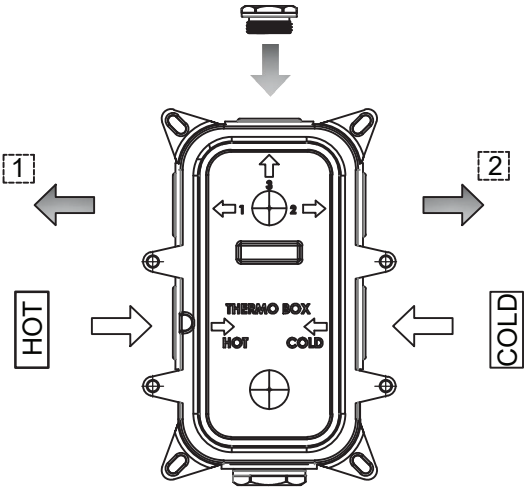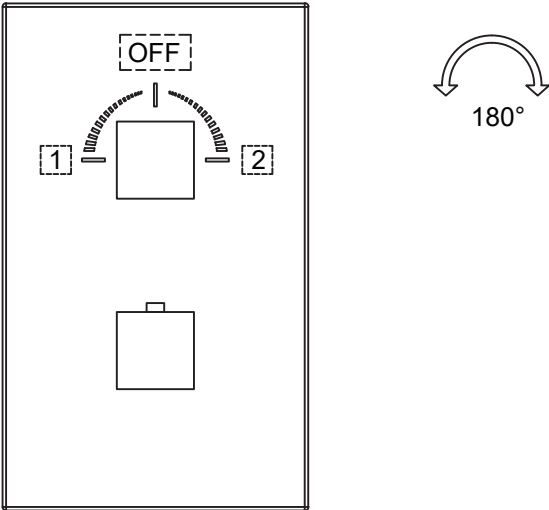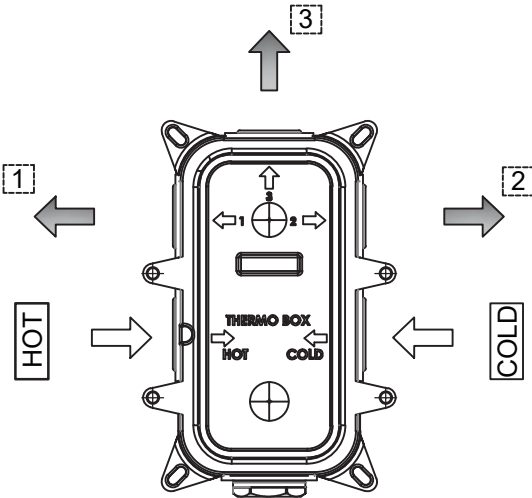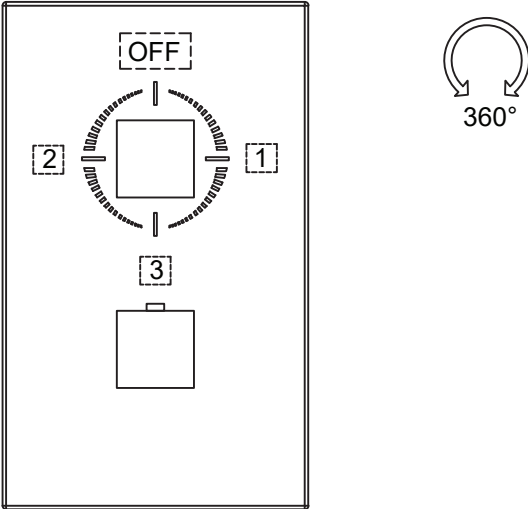

1 OUTLET 	1 OUTLET 
2 OUTLET 	2 OUTLET 
3 OUTLET 	3 OUTLET 

In this pre-installation phase it is necessary to choose how to use the built-in body. It is possible to make use of minimum 1 output up to a maximum of 3 outputs, installing, as shown, the caps contained in the packed in order to to obstruct the unused outputs. Make use of the service diagrams for the realization of the plant and for the correct installation position of the caps.

CAUTION !



WARNING : graphic representation of the installation is based on the use of 3 outlet but it is the same also for all other cases mentioned before.

Fig. 1

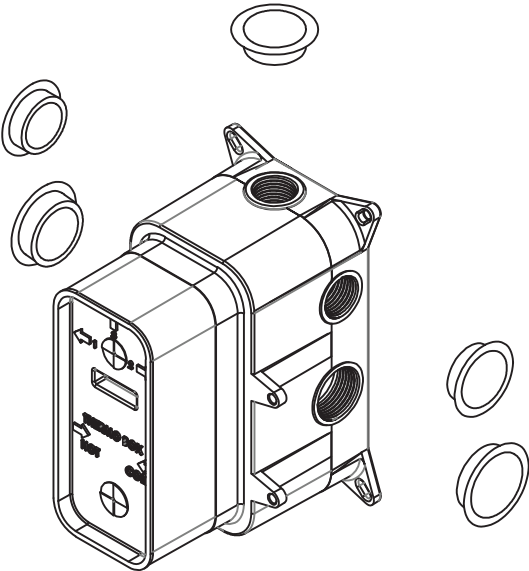


Fig. 2

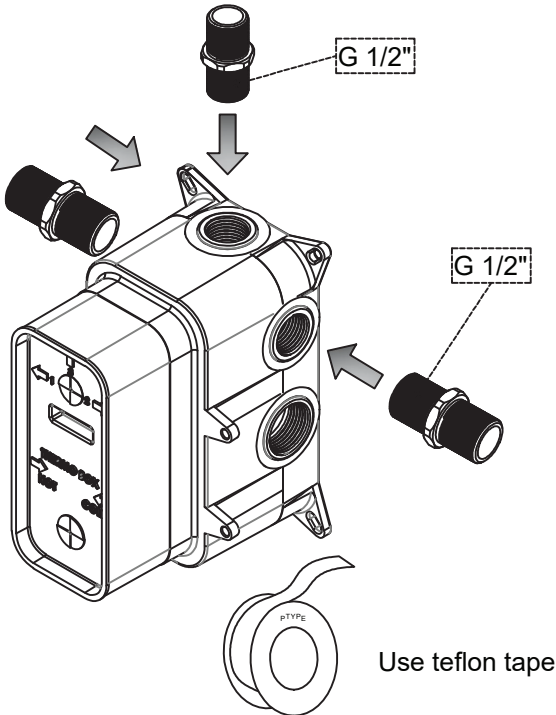


Fig. 3

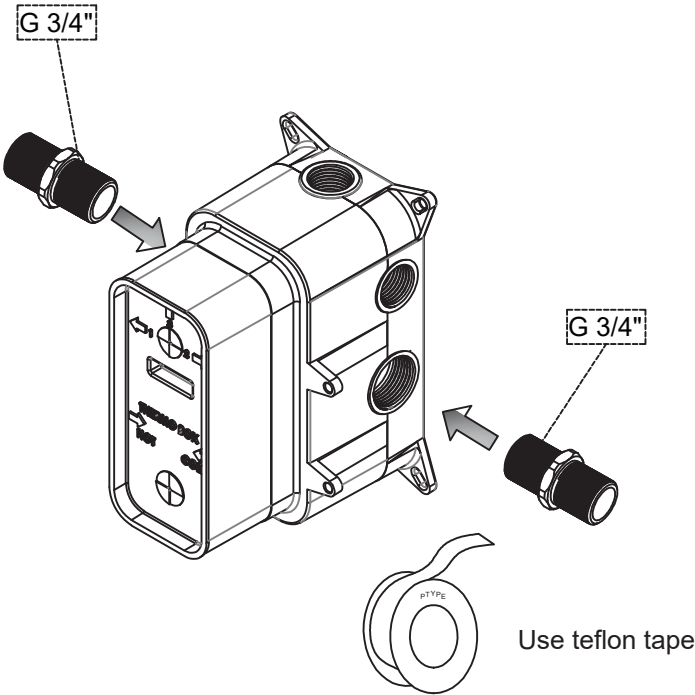


Fig. 4

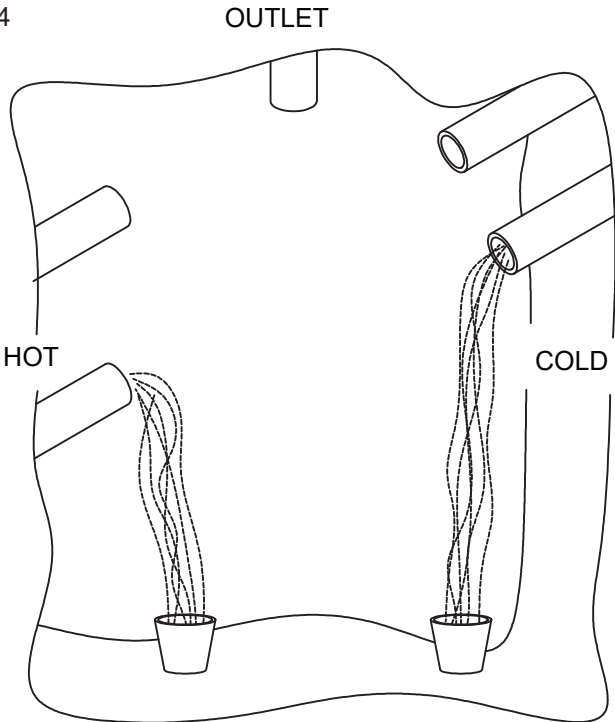


Fig. 5

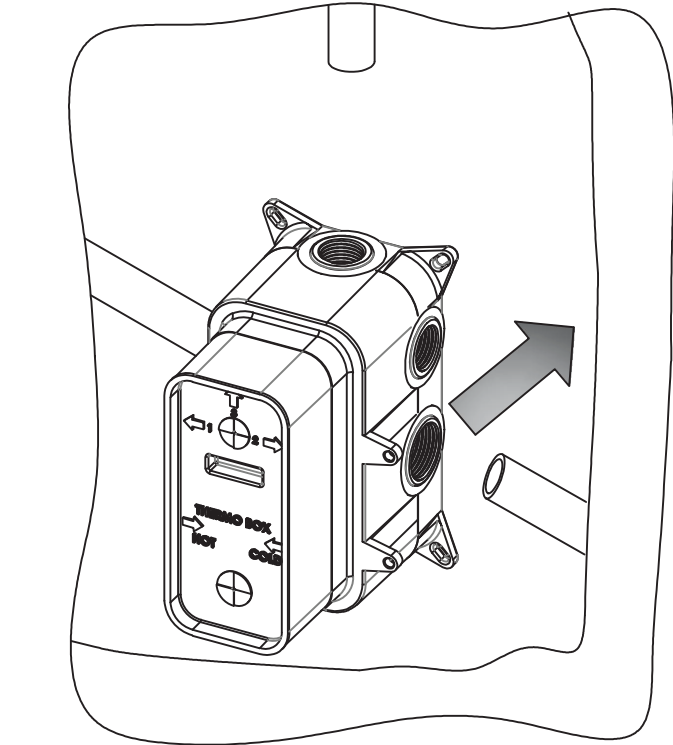


Fig. 6

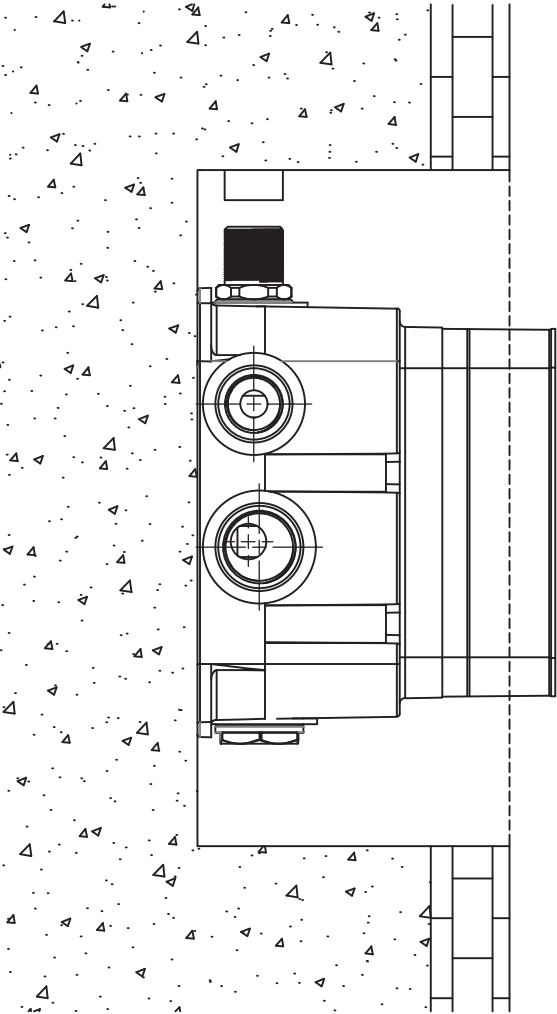


Fig. 7

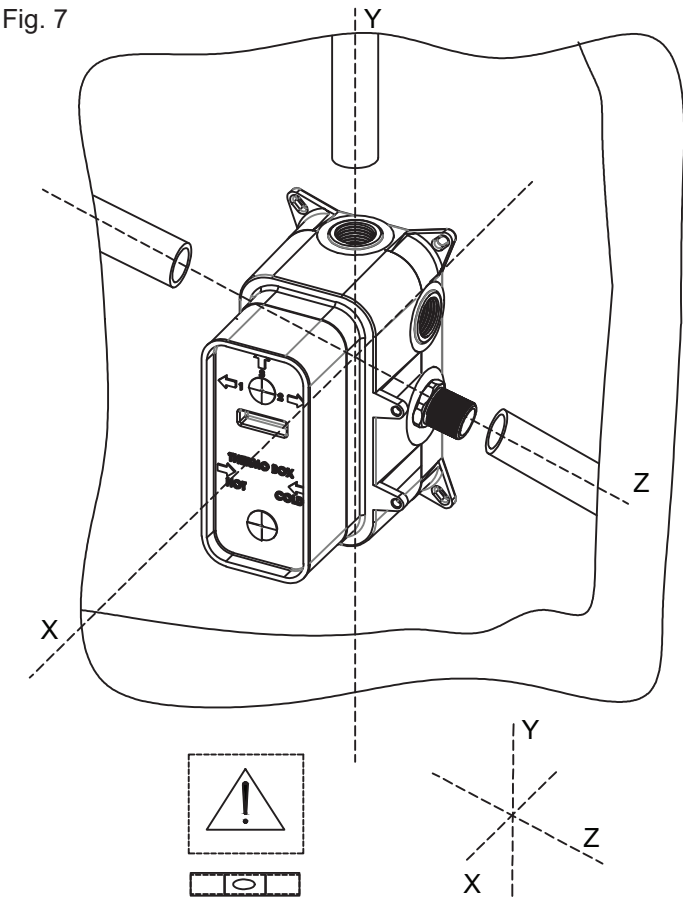


Fig. 8


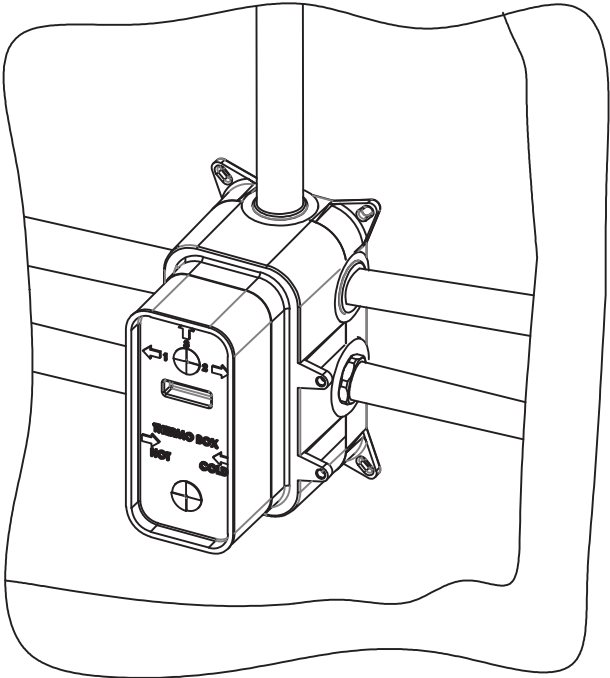


Fig. 9



Check the water tightness of the external gaskets

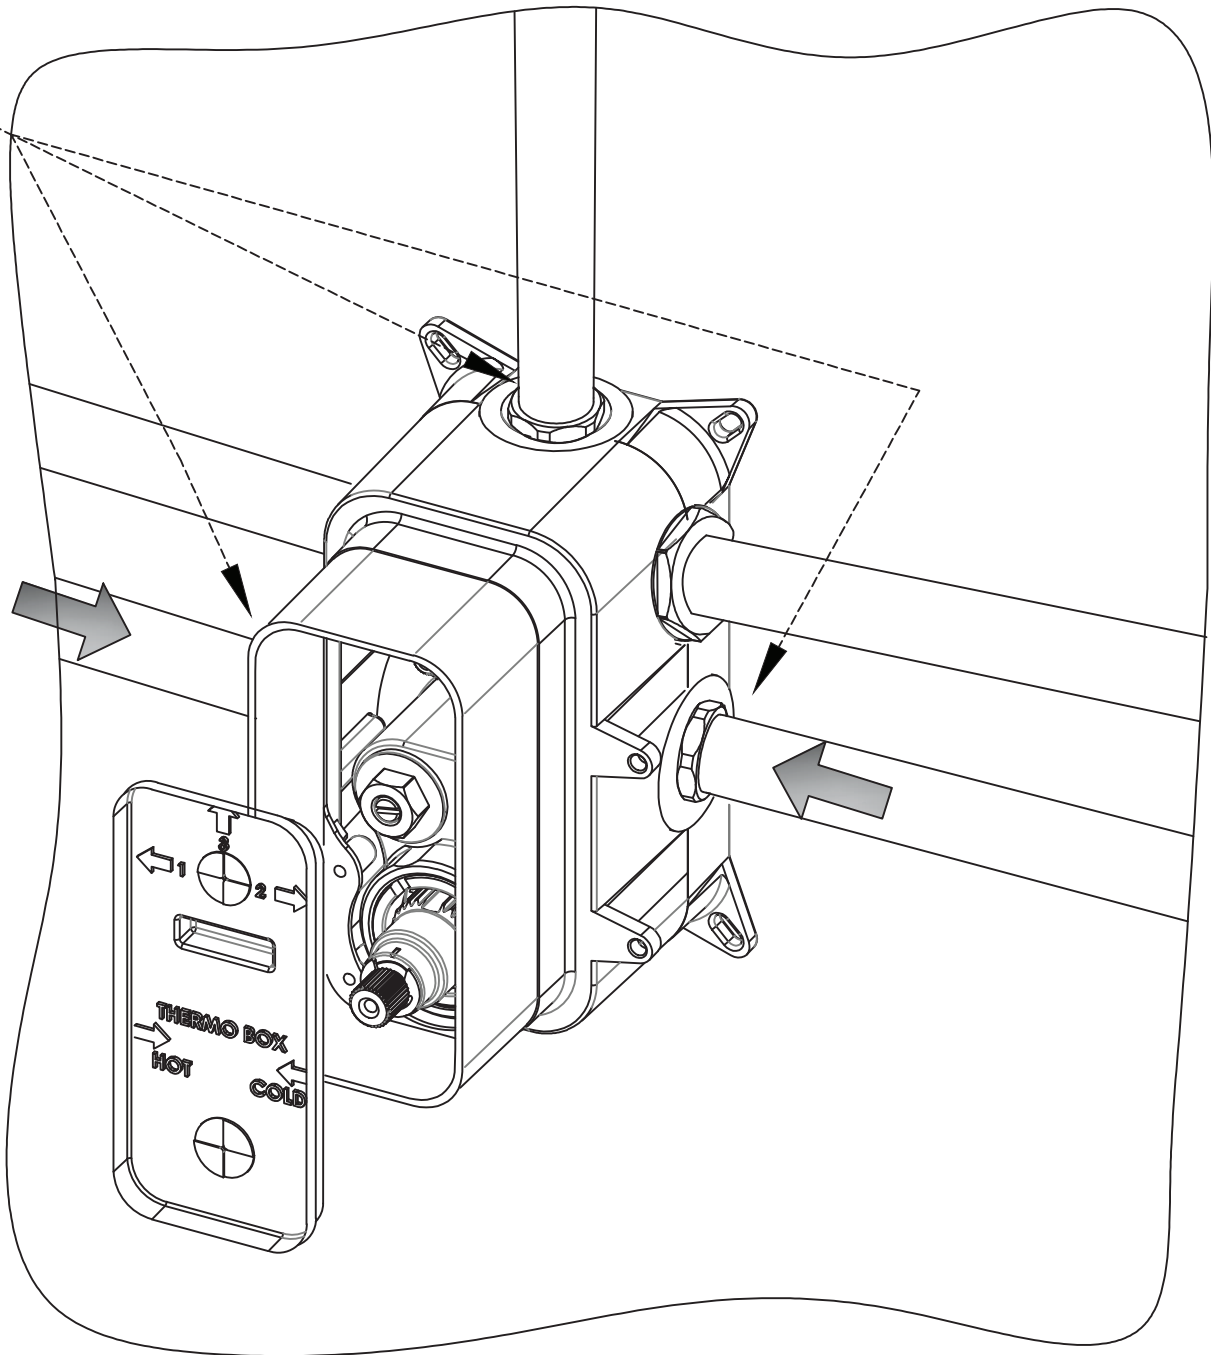


Fig. 10

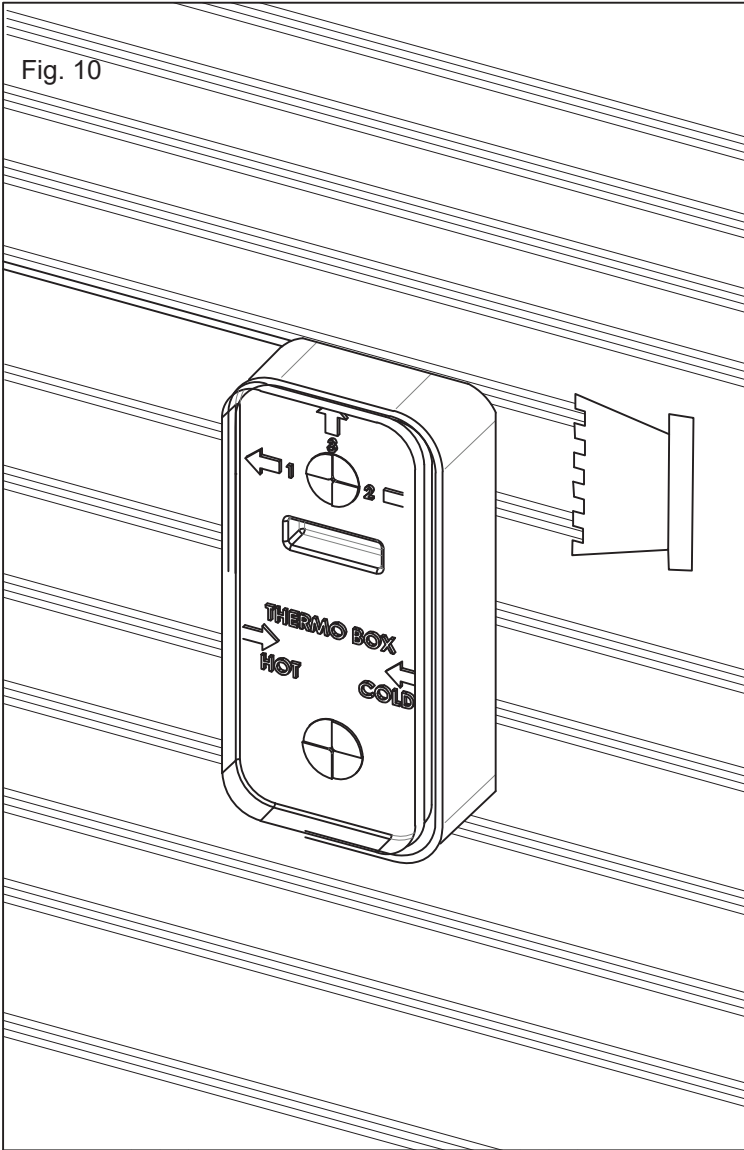


Fig. 11

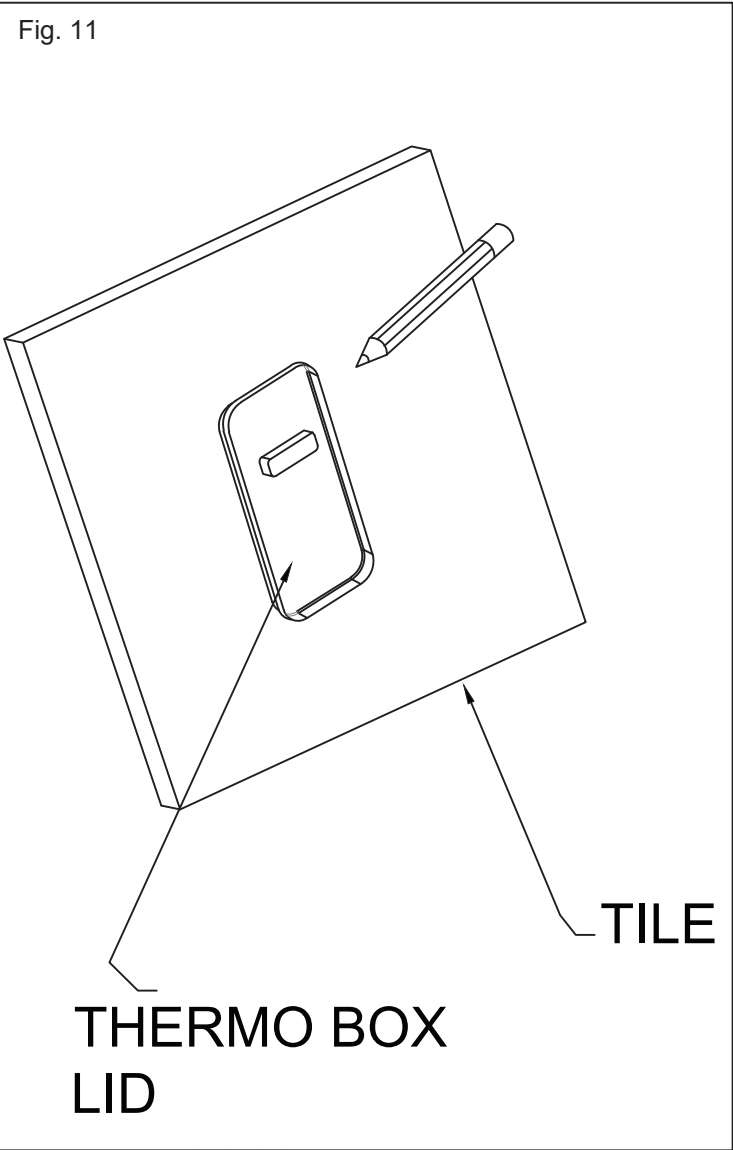


Fig. 12



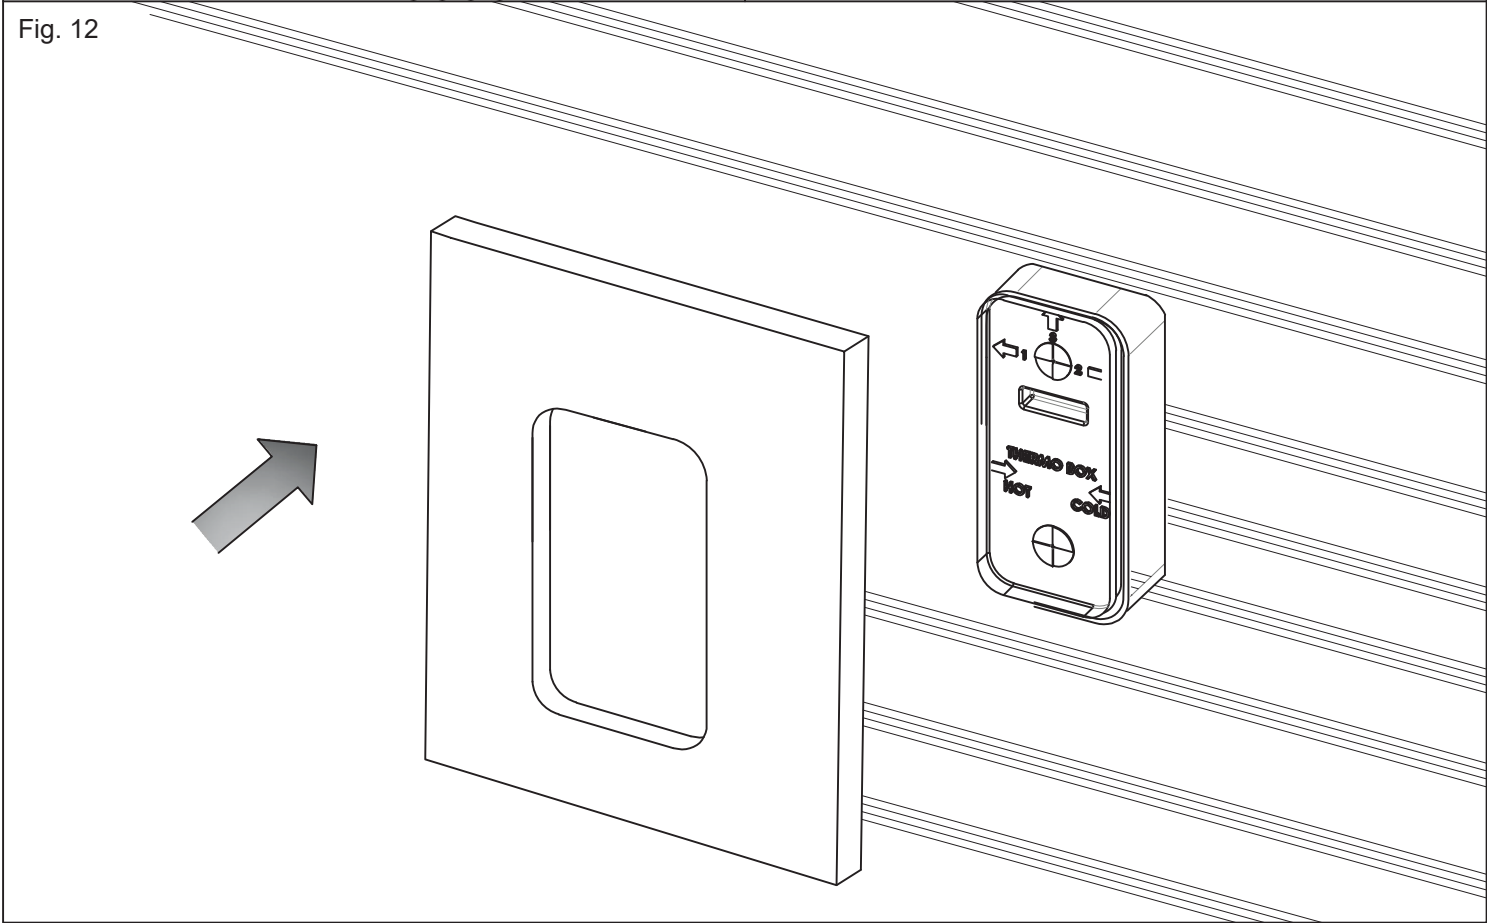


Fig. 13

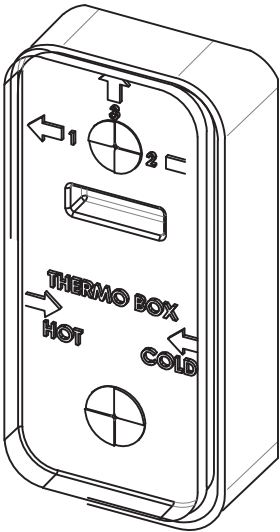


RIGHT INSTALLATION

19-39mm



SPARE PARTS

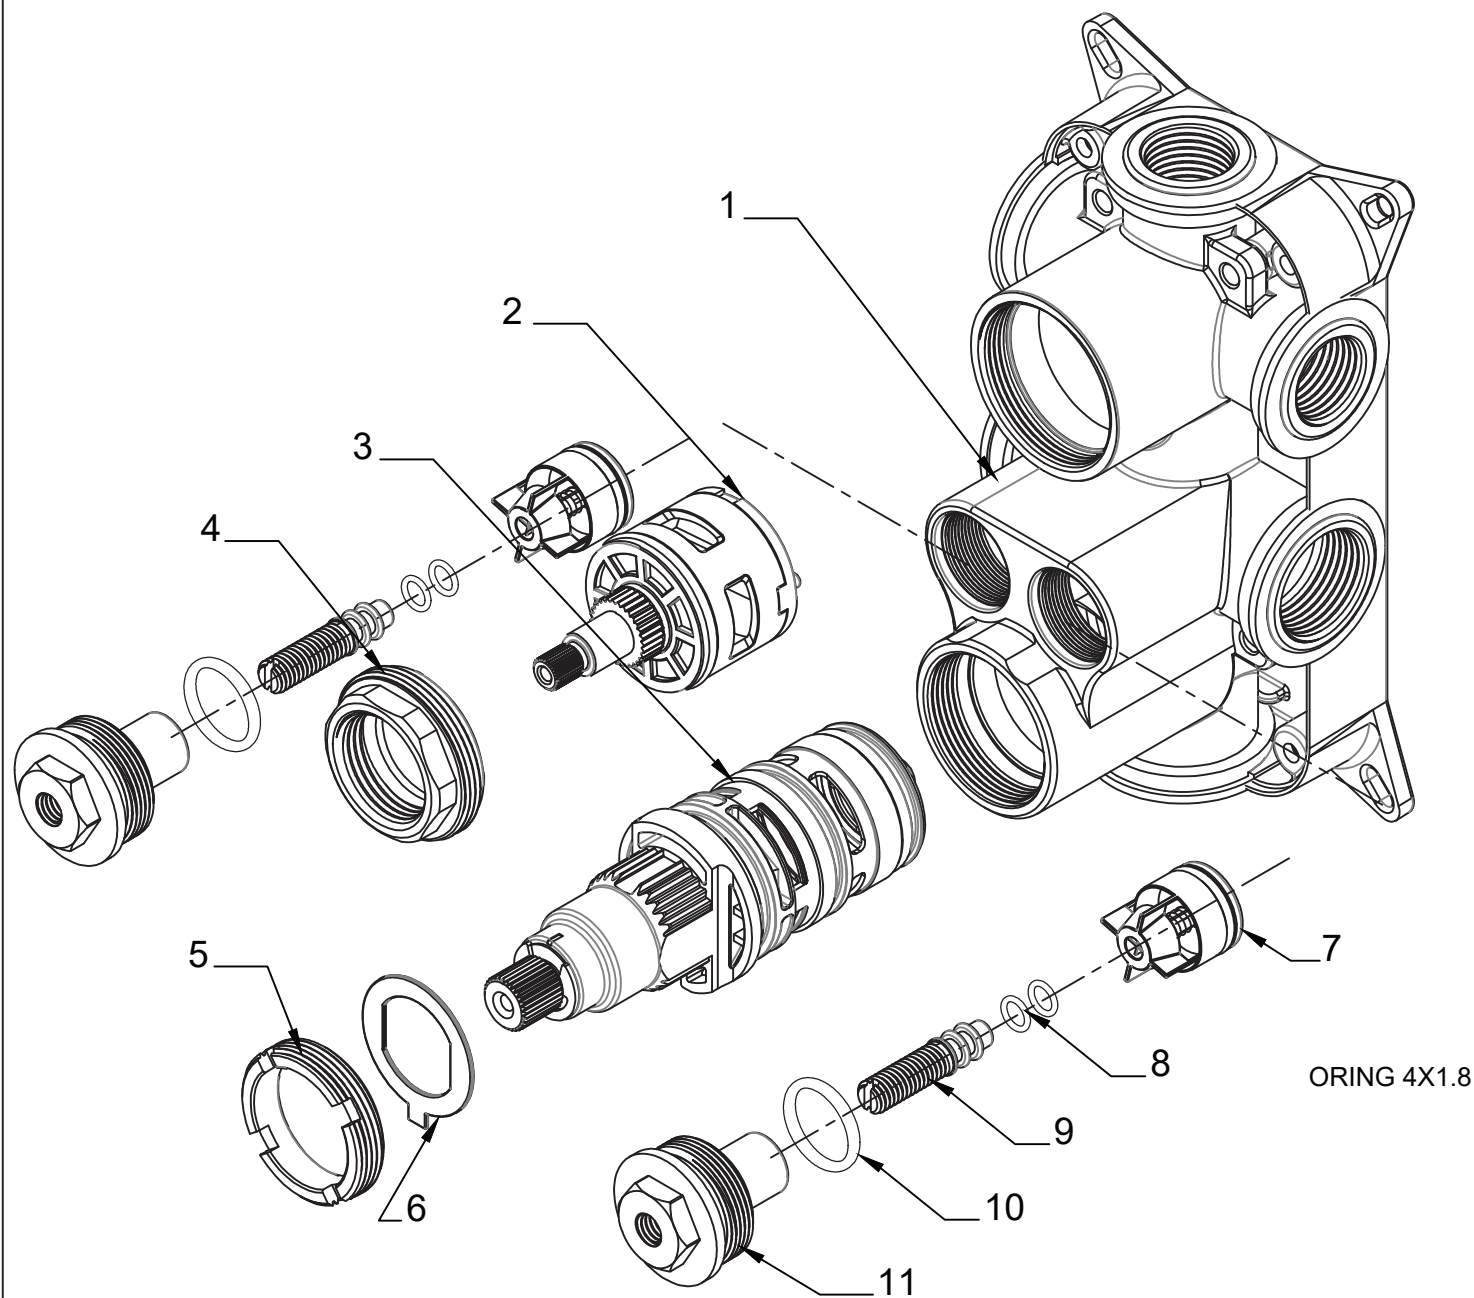

S. NO	PART NAME
1.	CONCEALED BODY
2.	3WAY OUTLET CARTRIDGE 35MM
3.	THERMOSTATIC WHITE CARTRIDGE
4.	DIVERTER CART NUT 39X1.5
5.	THERMOSTATIC CART NUT 36X1.5
6.	THERMOSTATIC CARTRIDGE LOCK STEEL
7.	CHECK VALVE 20MM
8.	O RING
9.	NRV SPINDLE
10.	O RING 17X2
11.	NRV NUT NEW

