## PRODUCT DATASHEET

Presa Recessed Mirror cabinet - Double door 600 mm








A versatile mirror cabinet with mirrored sides, LED lighting, demister, and shaver/USB socket—suitable for recessed or surface mounting.

## **PRODUCT DETAILS**

Colour temperature rating   Variable 2700K - 6500K	Finishes	Matt black frame, mirrored glass door	
Switch type         Touch operated; on RH door glass           Dimensions         Width         600 mm           Height         700 mm           Depth         117 mm           Door opening angle         110°           Installation sizes (for recessed installations)         Aperture width         584 mm           Aperture height         684 mm           Aperture depth         98 mm           Electrical connection         1 m cable; bottom centre rear           Voltage         220 ~240V AC; 50/60 Hz           LED Power         16W           De-mister power         8W (on each door)           Shaver socket         Integral; 220V           IP rating         IP44           Weight         18 kg	Lighting	Туре	LED glow strip around door edge
Dimensions         Width Height 700 mm           Depth Depth 1117 mm         117 mm           Door opening angle 110°         110°           Installation sizes (for recessed installations)         Aperture width Aperture width 684 mm         584 mm           Aperture depth 98 mm         4 m cable; bottom centre rear         4 m cable; bottom centre rear         4 m cable; bottom centre rear           Voltage         220 ~240V AC; 50/60 Hz         4 m cable; bottom centre rear         4 m cable; bottom centre rear		Colour temperature rating	Variable 2700K – 6500K
Height   700 mm     Depth   117 mm     Door opening angle   110°     Installation sizes (for recessed installations)   Aperture width   Aperture height   684 mm     Aperture depth   98 mm     Electrical connection   1 m cable; bottom centre rear     Voltage   220 ~240 V AC; 50/60 Hz     LED Power   16W     De-mister power   8W (on each door)     Shaver socket   Integral; 220 V     IP rating   IP44     Weight   18 kg	Switch type	Touch operated; on RH door glass	
Depth   117 mm	Dimensions	Width	600 mm
Door opening angle		Height	700 mm
Aperture width   584 mm		Depth	117 mm
Aperture height		Door opening angle	110°
Aperture height		Aperture width	584 mm
Electrical connection         1 m cable; bottom centre rear           Voltage         220 ~240V AC; 50/60 Hz           LED Power         16W           De-mister power         8W (on each door)           Shaver socket         Integral; 220V           IP rating         IP44           Weight         18 kg		Aperture height	684 mm
Voltage         220 ~240V AC; 50/60 Hz           LED Power         16W           De-mister power         8W (on each door)           Shaver socket         Integral; 220V           IP rating         IP44           Weight         18 kg		Aperture depth	98 mm
LED Power         16W           De-mister power         8W (on each door)           Shaver socket         Integral; 220V           IP rating         IP44           Weight         18 kg	Electrical connection	1 m cable; bottom centre rear	
De-mister power         8W (on each door)           Shaver socket         Integral; 220V           IP rating         IP44           Weight         18 kg	Voltage	220 ~240V AC; 50/60 Hz	
Shaver socket         Integral; 220V           IP rating         IP44           Weight         18 kg	LED Power	16W	
IP rating         IP44           Weight         18 kg	De-mister power	8W (on each door)	
Weight 18 kg	Shaver socket	Integral; 220V	
	IP rating	IP44	
Warranty 3 years	Weight	18 kg	
Training C yourd	Warranty	3 years	
Code TPE-260	Code	TPE-260	

## **TECHNICAL DRAWING**

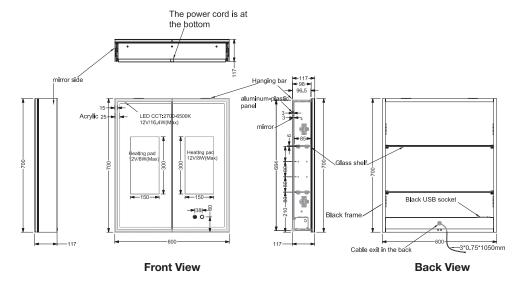

584

