



Class 1 insulation

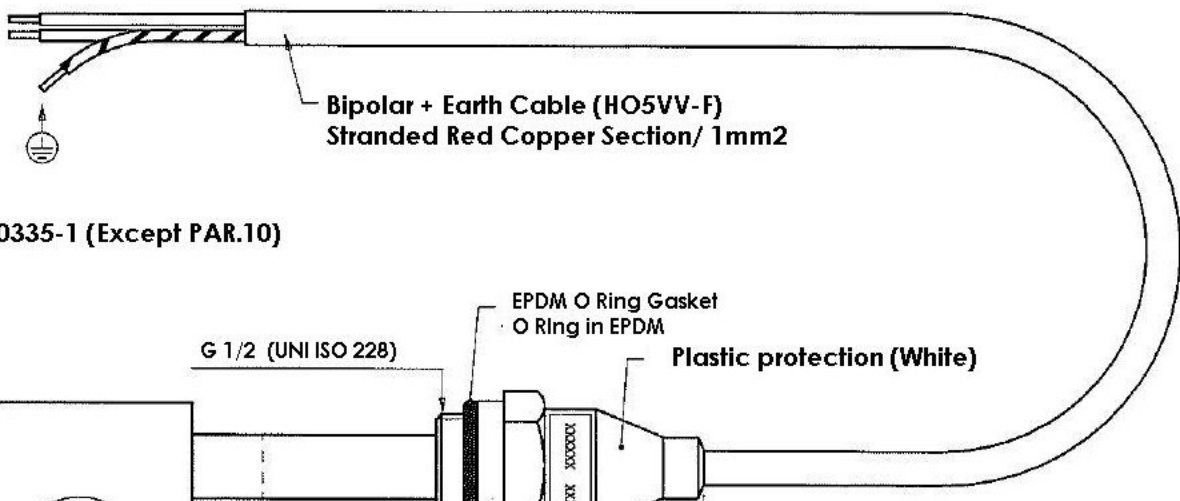

Reference standards for construction and electrical testing: CEI EN 60335-1 (Except PAR.10)

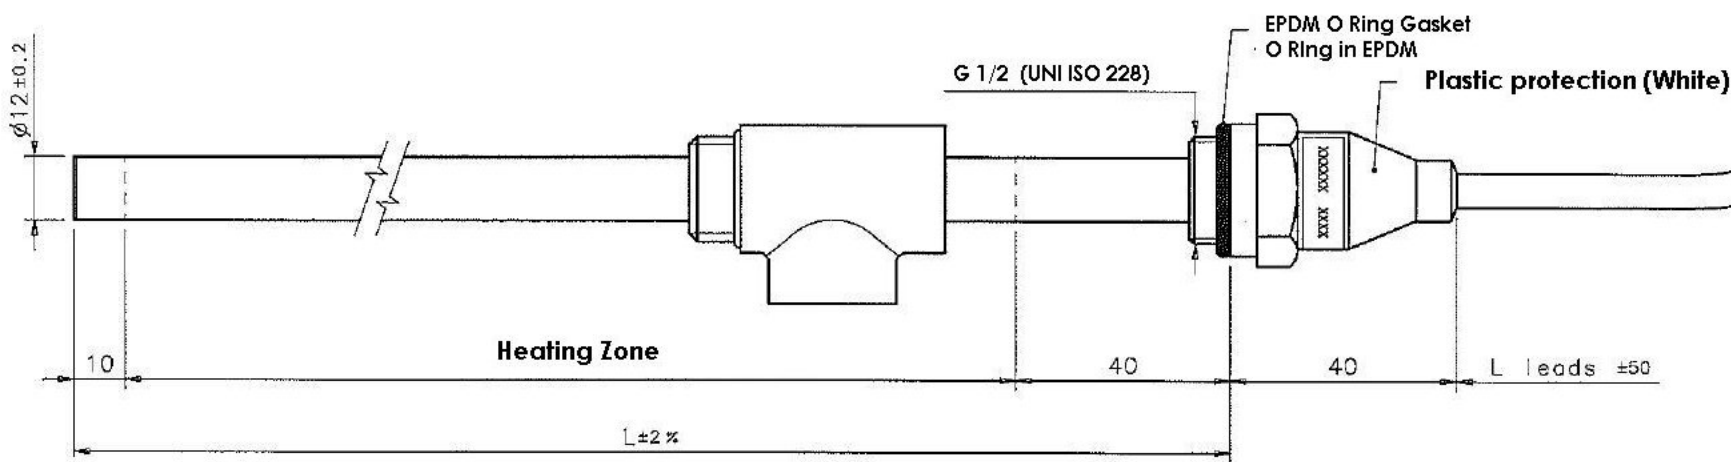

Application and Warning,

Assembly- the heater must be assembled vertically, from the bottom of the towel rail.
 In the case of any damage to the electrical connections, the heater must be returned to the supplier or be serviced by a qualified electrician. Do not alter any of the factory fitted electrical connections. For heaters fitted without a feed plug. An isolating device ensuring disconnection from the circuit must be fitted.
 There must be at least 3mm between contacts when in the open position.
 Residual current circuit breaker (RCD) should be fitted in line with the Current IEE regulations

Heating element only for use with water or glycol and water filled towel rail
 Maximum heating element surface temperature 100 C

005	300w std 3m cable	230	300 35% -35%	WATER 100°C	300	3000
004		230	900 35% -35%	WATER 100°C	920	1500
003		230	600 35% -35%	WATER 100°C	620	1500
002		230	300 35% -35%	WATER 100°C	300	1500
001		230	150 35% -35%	WATER 100°C	220	1500
Pos.		Volt	Watt	Rif. potenza	L	L leads

tissino

Designed to Inspire
 Made to Experience