

Marcello Towel Radiators

Technical Overview, Installation & Care Instructions

tissino

Congratulations on your purchase

Marcello radiators offer superior heating performance and can be used as a single source of heat in your bathroom. Please ensure this radiator is installed by a qualified engineer.

Installation Instructions

1. Accurately mark out fixing holes on wall using a spirit level. The mountings on the towel rail are to be moved fully to the outer edges of the horizontal bars in which they are fitted.
2. Drill four 8mm holes for the brackets (C). Screw brackets in to wall-plugs (A) using 5.5 x 45mm screws (B).
3. Screw the 4x studs (D) into the mountings on the back of the towel rail.
4. Hang the towel rail by aligning the studs (D) with the brackets previously fixed to the wall (C).
5. Secure the stud (D) with the grub screw (E) after setting the distance from the wall.

Care Instructions


1. Clean the radiator with a lint free cloth with warm water only.
2. Bleeding the radiator is done by twisting the bleed valve at the top of the radiator by hand. Once all the air has escaped and water starts to bleed out, tighten the valve ensuring it is water tight.

Note to installer: Please ensure the user understands and is confident with this process.

Bleeding does not apply to electric only rails

For any queries regarding installation of Marcello or other, please contact us using the details below.

Technical Overview

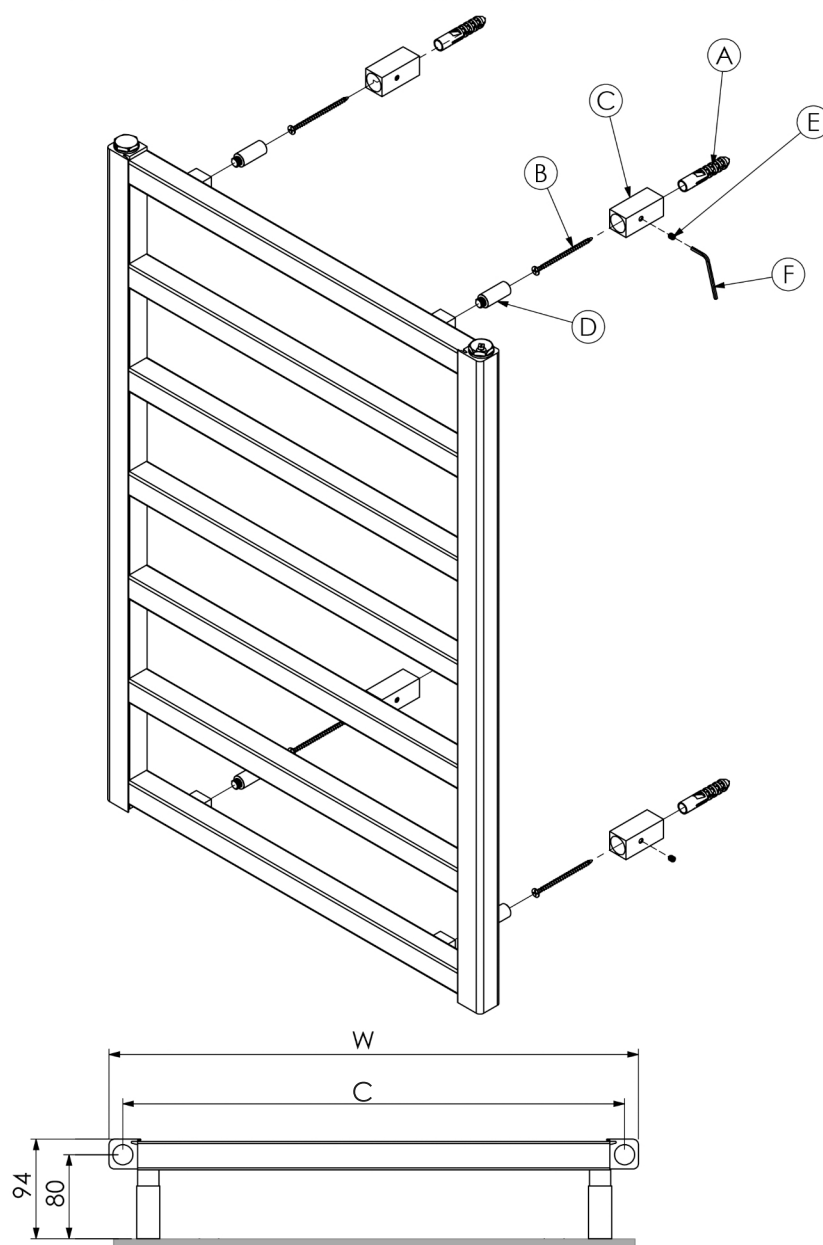

The tapping centers (C) for Marcello radiators are 25 mm less than the radiator width (W) and 80 mm out of the wall.

tissino

T 0345 582 8000
E info@tissino.co.uk
W tissino.co.uk

Lyncastle Road
Appleton Thorn
Warrington WA4 4SN

